

## HA-12ways Plastic Distribution Box

#### **Dimension:**


Type	Lenght(mm)	Width(mm)	Height(mm)
HA 2-4ways(IP65)	140	210	100
HA 8ways(IP65)	215	210	100
HA 12ways(IP65)	300	260	140
HA 18ways(IP65)	410	285	140
HA 24ways(IP65)	415	300	140


# HK-8ways Plastic Distribution Box

#### **Dimension:**


Туре	Lenght(mm)	Width(mm)	Height(mm)
HK 2-5ways(IP65)	140	140	105
HK 8ways(IP65)	185	185	105
HK 12ways(IP65)	270	195	105
HK 18ways(IP65)	370	195	105

# LGD-12ways(N) Plastic Distribution Box





Туре	Lenght(mm)	Width(mm)	Height(mm)
LGD 3ways	115	138	75
LGD 6ways	180	155	90
LGD 8ways	190	220	90
LGD 12ways	298	198	100
LGD 18ways	415	212	90
LGD 24ways	300	323	90

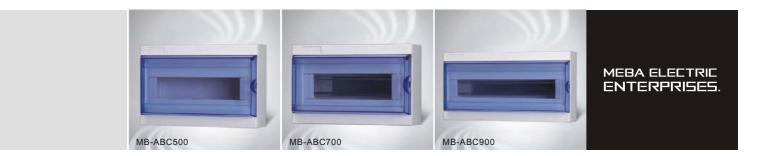

### MB-ABC Plastic Distribution Box


#### **Specification:**

MB-ABC Flush series Modular distribution boxes/distribution boards are mainly used in the circuit of AC 50Hz, rated voltage 220V/380V, and acted to install the modular combination equipment. It is widely used in the family, high building, house, station, port, airport, commercial house, hospital, cinema, enterprises and so on occassions. The plastic unit of the MB-ABC Flush series Modular distribution boxes/distribution boards adopt ABS material with the characteristics of flame-proof, impulse proof, excellent insulation property and so on.

This distribution boxes/boards enclosure confirm to standard BS EN60439-3, JB/T7121-93.

#### **Structure and Feature:**

This distribution boxes/Distribution board enclosure is provided with elegant appearance and reasonable structures; Installation and dismounting are easy. The products is designed according to the requirement of standardization, generalization and seriation, which make the products with excellent interchangeability.

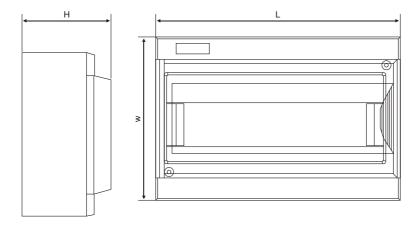

Туре	Lenght(mm)	Width(mm)	Height(mm)	
MB-ABC500	200	174	95	
MB-ABC700	255	172	95	
MB-ABC900	328	172	95	



### MB-AF Plastic Distribution Box

#### **Specification:**


MB-AF Flush series Modular distribution boxes/distribution boards are the new design with the fashion door. They are mainly used in the circuit of AC 50Hz, rated voltage 220V/380V, and acted to install the modular combination equipment. It is widely used in the family, high building, house, station, port, airport, commercial house, hospital, cinema, enterprises and so on occassions. The plastic unit of the MB-AF modular distribution boxes/distribution boards adopt ABS material with the characteristics offlame-proof, impulse proof, excellent insulation property and so on.


This distribution boxes/boards enclosure confirm to standard BSEN60439-3, JB/T7121-93.

#### **Structure and Feature:**

This distribution boxes/distribution boards enclosure is provided with elegant appearance and reasonable structures; Installation and dismounting are easy. The products are designed according to the requirement of standardization, generalization and seriation, which make the products with excellent interchangeability.

This distribution box has 6way, 8way, 12way, 16way, 24way and 36way.

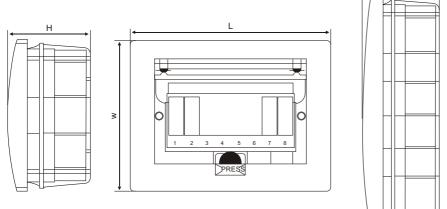



Туре	H1	H2	Н3	L	L1	W1	W
MB-AF 6ways	60	74	99.5	185	172	130	141
MB-AF 8ways	60	74	99.5	230	216.2	165.2	175
MB-AF 12ways	60	74	99.5	308	296.2	200.2	209
MB-AF 16ways	59	73	103	233	219.2	279.2	290
MB-AF 24ways	59	73	103	314	299.2	333.2	344
MB-AF 36ways	59	73	103	314	299.2	428.7	110



### MB-AF Plastic Distribution Box

#### **Specification:**


MB-AF Flush series Modular distribution boxes/distribution boards are the new design with the fashion door. They are mainly used in the circuit of AC 50Hz, rated voltage 220V/380 V, and acted to install the modular combination equipment. It is widely used in the family, high building, house, station, port, airport, commercial house, hospital, cinema, enterprises and so on occassions. The plastic unit of the MB-AF modular distribution boxes/distribution boards adopt ABS material with the characteristics offlame-proof, impulse proof, excellent insulation property and so on.


This distribution boxes/boards enclosure confirm to standard BSEN60439-3, JB/T7121-93.

#### **Structure and Feature:**

This distribution boxes/distribution boards enclosure is provided with elegant appearance and reasonable structures; Installation and dismounting are easy. The products are designed according to the requirement of standardization, generalization and seriation, which make the products with excellent interchangeability.

This distribution box has 6way, 8way, 12way, 16way, 24way and 36way.

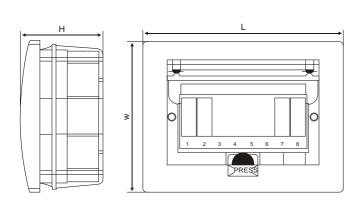



Туре	H1	H2	Н3	L	L1	W1	W
MB-AF 6ways	60	74	99.5	185	172	130	141
MB-AF 8ways	60	74	99.5	230	216.2	165.2	175
MB-AF 12ways	60	74	99.5	308	296.2	200.2	209
MB-AF 16ways	59	73	103	233	219.2	279.2	290
MB-AF 24ways	59	73	103	314	299.2	333.2	344
MB-AF 36ways	59	73	103	314	299.2	428.7	110



### MB-AS Plastic Distribution Box

#### **Specification:**


MB-AS Surface series Modular distribution boxes/distribution boards are the new design with the fashion door. They are mainly used in the circuit of AC50Hz, rated voltage 220V/380V, and acted to install the modular combination equipment. It is widely used in the family, high building, house, station, port, airport, commercial house, hospital, cinema, enterprises and so on occassions. The plastic unit of the MB-AS modular distribution boxes/distribution boards adopt ABS material with the characteristics of flame-proof, impulse proof, excellent insulation property and so on.


This distribution boxes/boards enclosure confirm to standard BS EN60439-3, JB/T7121-93.


#### **Structure and Feature:**

This distribution boxes/distribution boards enclosure is provided with elegant appearance and reasonable structures; Installation and dismounting are easy. The products are designed according to the requirement of standardization, generalization and seriation, which make the products with excellent interchangeability.

This distribution box has 6way, 8way, 12way, 16way, 24way and 36way.

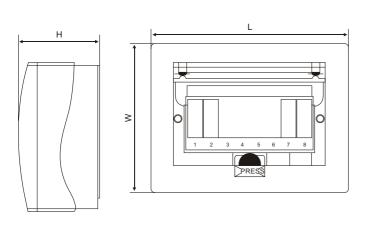





Туре	Lenght	Width	Height
MB-AS 6ways	185	141	100
MB-AS 8ways	230	175	100
MB-AS 12ways	308	290	100
MB-AS 16ways	233	290	104
MB-AS 24ways	314	344	104
MB-AS 36ways	314	440	104



### MB-AS Plastic Distribution Box

#### **Specification:**


MB-AS Surface series Modular distribution boxes/distribution boards are the new design with the fashion door. They are mainly used in the circuit of AC 50Hz, rated voltage 220V/380V, and acted to install the modular combination equipment. It is widely used in the family, high building, house, station, port, airport, commercial house, hospital, cinema, enterprises and so on occassions. The plastic unit of the MB-AS modular distribution boxes/distribution boards adopt ABS material with the characteristics of flame-proof, impulse proof, excellent insulation property and so on.


This distribution boxes/boards enclosure confirm to standard BSEN60439-3, JB/T7121-93.


#### **Structure and Feature:**


This distribution boxes/distribution boards enclosure is provided with elegant appearance and reasonable structures; Installation and dismounting are easy. The products are designed according to the requirement of standardization, generalization and seriation, which make the products with excellent interchangeability.

This distribution box has 6way, 8way, 12way, 16way, 24way and 36way.









Type	Lenght	Width	Height	
MB-AS 6ways	185	141	100	
MB-AS 8ways	230	175	100	
MB-AS 12ways	308	290	100	
MB-AS 16ways	233	290	104	
MB-AS 24ways	314	344	104	
MB-AS 36ways	314	440	104	



### MB-LF Plastic Distribution Box

#### **Specification:**


MB-LF Flush type series Modular distribution boxes/distribution boards are mainly used in the circuit of AC 50Hz, rated voltage 220V/380V, and acted to install the modular combination equipment. It is widely used in the family, high building, house, station, port, airport, commercial house, hospital, cinema, enterprises and so onoccassions. The plastic unit of the MB-LF modular distribution boxes/distribution boards adopt ABS material with the characteristics of flame-proof, impulse proof, excellent insulation property and so on.


This distribution boxes/boards enclosure confirm to standard BSEN60439-3, JB/T7121-93.

#### **Structure and Feature:**

This distribution boxes/distribution boards enclosure is provided with elegant appearance and reasonable structures; Installation and dismounting are easy. The products are designed according to the requirement of standardization, generalization and seriation, which make the products with excellent interchangeability.

This distribution box has 6way, 8way, 12way, 16way, 24way and 36way.





Туре	H1	H2	Н3	L	L1	W1	W
MB-LF 6ways	60	74	99.5	185	172	130	141
MB-LF 8ways	60	74	99.5	230	216.2	165.2	175
MB-LF 12ways	60	74	99.5	308	296.2	200.2	209
MB-LF 16ways	59	73	103	233	219.2	279.2	290
MB-LF 24ways	59	73	103	314	299.2	333.2	344
MB-LF 36ways	59	73	103	314	299.2	428.7	110



### MB-LF Plastic Distribution Box

#### **Specification:**


MB-LF Flush type series Modular distribution boxes/distribution boards are mainly used in the circuit of AC 50Hz, rated voltage 220V/380V, and acted to install the modular combination equipment. It is widely used in the family, high building, house, station, port, airport, commercial house, hospital, cinema, enterprises and so onoccassions. The plastic unit of the MB-LF modular distribution boxes/distribution boards adopt ABS material with the characteristics of flame-proof, impulse proof, excellent insulation property and so on.


This distribution boxes/boards enclosure confirm to standard BS EN60439-3, JB/T7121-93.

#### **Structure and Feature:**

This distribution boxes/distribution boards enclosure is provided with elegant appearance and reasonable structures; Installation and dismounting are easy. The products are designed according to the requirement of standardization, generalization and seriation, which make the products with excellent interchangeability.

This distribution box has 6way, 8way, 12way, 16way, 24way and 36way.





Туре	H1	H2	Н3	L	L1	W1	W
MB-LF 6ways	60	74	99.5	185	172	130	141
MB-LF 8ways	60	74	99.5	230	216.2	165.2	175
MB-LF 12ways	60	74	99.5	308	296.2	200.2	209
MB-LF 16ways	59	73	103	233	219.2	279.2	290
MB-LF 24ways	59	73	103	314	299.2	333.2	344
MB-LF 36ways	59	73	103	314	299.2	428.7	110



### MB-LS Plastic Distribution Box

#### **Specification:**


MB-LS Surface type series Modular distribution boxes/distribution boards are mainly used in the circuit of AC 50Hz, rated voltage 220V/380V, and acted to install the modular combination equipment. It is widely used in the family, high building, house, station, port, airport, commercial house, hospital, cinema, enterprises and so on occassions. The plastic unit of the MB-LS modular distribution boxes/distribution boards adopt ABS material with the characteristics of flame-proof, impulse proof, excellent insulation property and so on.


This distribution boxes/boards enclosure confirm to standard BS EN60439-3, JB/T7121-93.

#### **Structure and Feature:**

This distribution boxes/distribution boards enclosure is provided with elegant appearance and reasonable structures; Installation and dismounting are easy. The products are designed according to the requirement of standardization, generalization and seriation, which make the products with excellent interchangeability.

This distribution box has 6way, 8way, 12way, 16way, 24way and 36way.





Type	Lenght	Width	Height
MB-LS 6ways			
	185	141	100
MB-LS 8ways	230	175	100
MB-LS 12ways	308	290	100
MB-LS 16ways	233	290	104
MB-LS 24ways	314	344	104
MB-LS 36ways	314	440	104



### MB-LS Plastic Distribution Box

#### **Specification:**


MB-LS Surface type series Modular distribution boxes/distribution boards are mainly used in the circuit of AC 50Hz, rated voltage 220V/380V, and acted to install the modular combination equipment. It is widely used in the family, high building, house, station, port, airport, commercial house, hospital, cinema, enterprises and so on occassions. The plastic unit of the MB-LS modular distribution boxes/distribution boards adopt ABS material with the characteristics of flame-proof, impulse proof, excellent insulation property and so on.


This distribution boxes/boards enclosure confirm to standard BS EN60439-3, JB/T7121-93.

#### **Structure and Feature:**

This distribution boxes/distribution boards enclosure is provided with elegant appearance and reasonable structures; Installation and dismounting are easy. The products are designed according to the requirement of standardization, generalization and seriation, which make the products with excellent interchangeability.

This distribution box has 6way, 8way, 12way, 16way, 24way and 36way.





Туре	Lenght	Width	Height
MB-LS 6ways	185	141	100
MB-LS 8ways	230	175	100
MB-LS 12ways	308	290	100
MB-LS 16ways	233	290	104
MB-LS 24ways	314	344	104
MB-LS 36ways	314	440	104



### MB-S Plastic Distribution Box

#### **Specification:**


MB-S Surface type series Modular distribution boxes/distribution boards are mainly used in the circuit of AC 50Hz, rated voltage 220V/380V, and acted to install the modular combination equipment. It is widely used in the family, high building, house, station, port, airport, commercial house, hospital, cinema, enterprises and so on occassions. The plastic unit of the MB-S modular distribution boxes/distribution boards adopt ABS material with the characteristics of flame-proof, impulse proof, excellent insulation property and so on.


This distribution boxes/boards enclosure confirm to standard BSEN60439-3, JB/T7121-93.

#### **Structure and Feature:**

This distribution boxes/distribution boards enclosure is provided with elegant appearance and reasonable structures; Installation and dismounting are easy. The products are designed according to the requirement of standardization, generalization and seriation, which make the products with excellent interchangeability.

This distribution box has 1 way, 2 way, 4 way, 6 way and 8 way.





Туре	Lenght	Width	Height
MB-S 1ways	34	130	60
MB-S 2ways	52	130	60
MB-S 4ways	87	130	60
MB-S 6ways	123	130	60
MB-S 8ways	160	130	60



### MB-TS Plastic Distribution Box

#### **Specification:**


MB-TS Surface series Modular distribution boxes/distribution boards are mainly used in the circuit of AC 50Hz, rated voltage 220V/380V, and acted to install the modular combination equipment. It is widely used in the family, high building, house, station, port, airport, commercial house, hospital, cinema, enterprises and soon occassions. The plastic unit of the MB-TS Surface series Modular distribution boxes/distribution boards adopt ABS material with the characteristics of flame-proof, impulse proof, excellent insulation property and so on. This distribution boxes/boards enclosure confirm to standard BS EN60439-3, JB/T7121-93.


#### **Structure and Feature:**


This distribution boxes/Distribution boards enclosure is provided with elegant appearance and reasonable structures; Installation and dismounting are easy. The products is designed according to the requirement of standardization, generalization and seriation, which make the products with excellent interchangeability.

This distribution boxhas 4way, 6way, 8way, 10way, 12way, 15way, 18way, 24way upto 36way.

Туре	Lenght	Width	Height
MB-TS 4ways	112	200	95
MB-TS 6ways	148	200	95
MB-TS 8ways	184	200	95
MB-TS 10ways	222	200	95
MB-TS 12ways	256	200	95
MB-TS 15ways	310	200	95
MB-TS 18ways	365	222	95
MB-TS 24ways	271	325	97
MB-TS 36ways	271	462	100









### TSM Flush Plastic Distribution Box

#### **Iron Base Dimension:**

Туре	Lenght	Width	Height
TSM-2ways	99	140	60
TSM-4ways	107	190	85
TSM-6ways	143	190	85
TSM-8ways	179	190	85
TSM-10ways	222	200	85
TSM-12ways	250	190	85
TSM-15ways	306	190	85
TSM-18ways	361	217	85
TSM-24ways	252	310	85
TSM-36ways	290	475	85
TSM-45ways	473	326	76


#### **Plastics Base Dimension:**

Туре	Lenght	Width	Height
TSM-2ways	90	140	60
TSM-4ways	112	200	66
TSM-6ways	150	200	66
TSM-8ways	184	200	66
TSM-10ways	222	200	66
TSM-12ways	256	200	66
TSM-15ways	310	200	66
TSM-18ways	365	220	76
TSM-24ways	257	310	76
TSM-36ways	293	455	76
TSM-45ways	473	326	76


#### **Iron Base Dimension:**

Lenght	Width	Height	В
95	150	27	75
136	222	27	86
172	222	27	122
208	222	27	158
280	222	27	230
334	222	27	283
398	252	27	338
300	345	27	232
341	505	27	265
365	505	27	285
	95 136 172 208 280 334 398 300 341	95 150 136 222 172 222 208 222 280 222 334 222 398 252 300 345 341 505	95         150         27           136         222         27           172         222         27           208         222         27           280         222         27           334         222         27           398         252         27           300         345         27           341         505         27

#### **Metal Base Size:**

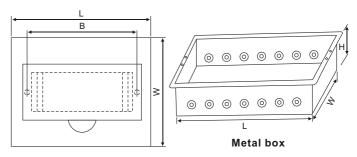



#### **Dark Plastic Crates Against the Wall-size:**

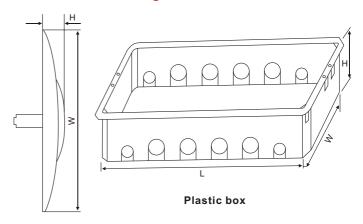

#### **Dark Plastic Cover Surface Size:**

#### Flush plastic cover







### TSM Flush Plastic Distribution Box

#### **Iron Base Dimension:**

Туре	Lenght	Width	Height
TSM-2ways	99	140	60
TSM-4ways	107	190	85
TSM-6ways	143	190	85
TSM-8ways	179	190	85
TSM-10ways	222	200	85
TSM-12ways	250	190	85
TSM-15ways	306	190	85
TSM-18ways	361	217	85
TSM-24ways	252	310	85
TSM-36ways	290	475	85
TSM-45ways	473	326	76


#### **Plastics Base Dimension:**

Туре	Lenght	Width	Height
TSM-2ways	90	140	60
TSM-4ways	112	200	66
TSM-6ways	150	200	66
TSM-8ways	184	200	66
TSM-10ways	222	200	66
TSM-12ways	256	200	66
TSM-15ways	310	200	66
TSM-18ways	365	220	76
TSM-24ways	257	310	76
TSM-36ways	293	455	76
TSM-45ways	473	326	76


#### **Iron Base Dimension:**

Type	Lenght	Width	Height	В
TSM-2ways	95	150	27	75
TSM-4ways	136	222	27	86
TSM-6ways	172	222	27	122
TSM-8ways	208	222	27	158
TSM-12ways	280	222	27	230
TSM-15ways	334	222	27	283
TSM-18ways	398	252	27	338
TSM-24ways	300	345	27	232
TSM-36ways	341	505	27	265
TSM-45ways	365	505	27	285
	•		•	

#### **Metal Base Size:**

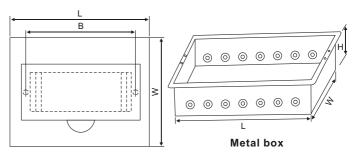



#### **Dark Plastic Crates Against the Wall-size:**

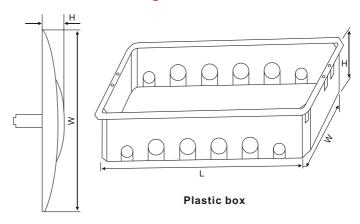

#### **Dark Plastic Cover Surface Size:**

Flush plastic cover







### TSM Flush Plastic Distribution Box

#### **Iron Base Dimension:**

Туре	Lenght	Width	Height
TSM-2ways	99	140	60
TSM-4ways	107	190	85
TSM-6ways	143	190	85
TSM-8ways	179	190	85
TSM-10ways	222	200	85
TSM-12ways	250	190	85
TSM-15ways	306	190	85
TSM-18ways	361	217	85
TSM-24ways	252	310	85
TSM-36ways	290	475	85
TSM-45ways	473	326	76


#### **Plastics Base Dimension:**

Туре	Lenght	Width	Height
TSM-2ways	90	140	60
TSM-4ways	112	200	66
TSM-6ways	150	200	66
TSM-8ways	184	200	66
TSM-10ways	222	200	66
TSM-12ways	256	200	66
TSM-15ways	310	200	66
TSM-18ways	365	220	76
TSM-24ways	257	310	76
TSM-36ways	293	455	76
TSM-45ways	473	326	76


#### **Iron Base Dimension:**

Туре	Lenght	Width	Height	В
TSM-2ways	95	150	27	75
TSM-4ways	136	222	27	86
TSM-6ways	172	222	27	122
TSM-8ways	208	222	27	158
TSM-12ways	280	222	27	230
TSM-15ways	334	222	27	283
TSM-18ways	398	252	27	338
TSM-24ways	300	345	27	232
TSM-36ways	341	505	27	265
TSM-45ways	365	505	27	285

#### **Metal Base Size:**

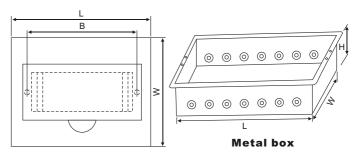



#### **Dark Plastic Crates Against the Wall-size:**

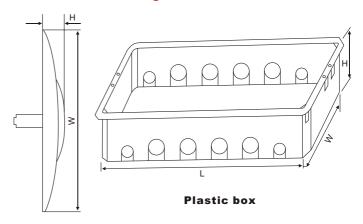

#### **Dark Plastic Cover Surface Size:**


#### Flush plastic cover









### TSM Surface Plastic Distribution Box






	<u>L</u>
<b>A</b>	


Туре	Lenght	Width	Height
TSM-2ways	90	140	60
TSM-4ways	112	210	100
TSM-6ways	148	210	100
TSM-8ways	184	210	100
TSM-10ways	222	210	100
TSM-12ways	256	210	100
TSM-15ways	312	210	100
TSM-18ways	364	222	100
TSM-24ways	270	325	100
TSM-36ways	305	473	100






### TSM Surface Plastic Distribution Box






	<del>←</del>
<b>^</b>	


Type	Lenght	Width	Height
TSM-2ways	90	140	60
TSM-4ways	112	210	100
TSM-6ways	148	210	100
TSM-8ways	184	210	100
TSM-10ways	222	210	100
TSM-12ways	256	210	100
TSM-15ways	312	210	100
TSM-18ways	364	222	100
TSM-24ways	270	325	100
TSM-36ways	305	473	100






### TSM Surface Plastic Distribution Box





	← L
<b>*</b>	

Туре	Lenght	Width	Height
TSM-2ways	90	140	60
TSM-4ways	112	210	100
TSM-6ways	148	210	100
TSM-8ways	184	210	100
TSM-10ways	222	210	100
TSM-12ways	256	210	100
TSM-15ways	312	210	100
TSM-18ways	364	222	100
TSM-24ways	270	325	100
TSM-36ways	305	473	100






## **Metal Distribution Box**

### GTL412C Metal Distribution Box

#### **Product Number Guide:**

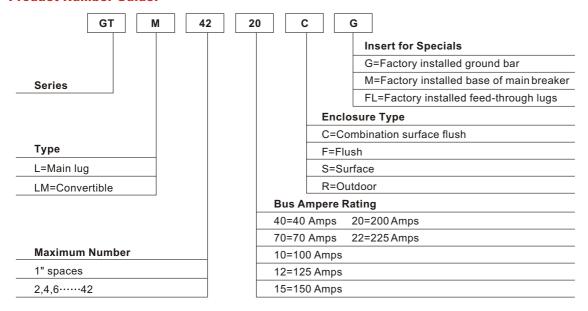

#### **Technical parameter:**

Product Number	Front Type	Main Ampere Rating	1"Sp	aces	1/2"Spaces		Total 1-pole Spaces
Product Number	Tronc Typo	Main Ampere Rating	1 Pole	2 Pole	1 Pole	2 Pole	Total 1-pole Spaces
GTL240S	Surface	40	2	1	4	1	4
GTL412C	Combination	125	4	2	8	3	8
GTL612F	Flush	125	6	3	12	4	12
GTL612FD	Flush	125	6	3	12	4	12
GTLM612FM	Flush	125	6	3	12	4	12
GTL612S	Surface	125	6	3	12	4	12
GTL612SD	Surface	125	6	3	12	4	12
GTLM612SM	Surface	125	6	3	12	4	12
GTL812F	Flush	125	8	4	16	8	16
GTL812FD	Flush	125	8	4	16	8	16
GTLM812FM	Flush	125	8	4	16	8	16
GTL812S	Surface	125	8	4	16	8	16
GTL812SD	Surface	125	8	4	16	8	16
GTLM812SM	Surface	125	8	4	16	8	16
GTLM1212C	Combination	200	12	6	24	10	24
GTLM1212CM	Combination	200	12	6	24	10	24
GTLM1620C	Combination	200	16	8	32	14	32



# **Metal Distribution Box**

### GTL412C Metal Distribution Box

#### **Technical parameter:**

Product Number	Front Type	Main Ampere Rating	1"Sp	aces	1/2"Spaces		Total 1-pole Spaces
Product Number	1 Tont Type	Main Ampère Nating	1 Pole	2 Pole	1 Pole	2 Pole	Total 1-pole Spaces
GTLM1620CM	Combination	200	16	8	32	14	32
GTLM2020C	Combination	200	20	10	40	18	40
GTLM2020CM	Combination	200	20	10	40	18	40
GTLM2412CM	Combination	125	24	12	-	-	24
GTLM2420C	Combination	200	24	12	42	18	42
GTLM2420CM	Combination	200	24	12	42	18	42
GTLM3220C	Combination	200	32	16	16	6	32
GTLM3220CM	Combination	200	32	16	16	6	32
GTLM4020C	Combination	200	40	20	-	-	40
GTLM4020CM	Combination	200	40	20	-	-	40
GTLM4222C	Combination	225	42	20	-	-	42
GTLM4222CM	Combination	225	42	20	-	-	42

### MT-DB-M12-310F Metal Distribution Box

#### **Technical parameter:**

Model	Weight(Kg)	
SP 125A		
DB-04-112F(S)	3	
DB-08-112F(S)	3.5	
TP 100AW/O Main breaker		
DB-12-310F(S)	8	
DB-18-310F(S)	8	
DB-24-31F(S)	10	
TP 100A With Main breaker		
DB-M08-310F(S)	7.5	
DB-M12-310F(S)	8.5	
DB-M18-310F(S)	9.5	
DB-M24-310F(S)	11	
DB-M30-310F(S)	12	
TP 100A Main breaker		
DB-M18-310 SS F(S)	13Kgs	
DB-M24-310 SS F(S)	14Kgs	
DB-M30-310 SS F(S)	15Kgs	
DB-M36-310 SS F(S)	16Kgs	
DB-M42-310 SS F(S)	17Kgs	



# **Stainless Steel Distribution Box**

### TS Metal Box Stainless Steel Distribution Box

#### **Specification:**

- TS Metal enclosure
- Single door
- IP65 weather proof metal box
- Many sizes for your selecting

#### **Technical parameter:**

Н	W	D	Thickness		
mm	mm	mm	Door/mm	Body/mm	M.P/mm
200	200	150	1.2	1.2	2
250	200	150	1.2	1.2	2
300	200	150	1.2	1.2	2
300	200	200	1.2	1.2	2
300	250	150	1.2	1.2	2
300	250	200	1.2	1.2	2
300	250	250	1.2	1.2	2
300	300	150	1.2	1.2	2
300	300	200	1.2	1.2	2
300	300	250	1.2	1.2	2
400	300	150	1.2	1.2	2
400	300	200	1.2	1.2	2
400	300	250	1.2	1.2	2
400	300	300	1.2	1.2	2
400	400	150	1.2	1.2	2
400	400	200	1.2	1.2	2
400	400	250	1.2	1.2	2
400	400	300	1.2	1.2	2
500	300	150	1.2	1.2	2
500	300	200	1.2	1.2	2
500	300	250	1.2	1.2	2
500	300	300	1.2	1.2	2
500	400	150	1.2	1.2	2
500	400	200	1.2	1.2	2
500	400	250	1.2	1.2	2
500	400	300	1.2	1.2	2
500	500	150	1.2	1.2	2
500	500	200	1.2	1.2	2

Н	W	D	Thickness	1	
mm	mm	mm	Door/mm	Body/mm	M.P/mm
500	500	250	1.2	1.2	2
500	500	300	1.2	1.2	2
600	400	150	1.2	1.2	2
600	400	200	1.2	1.2	2
600	400	250	1.2	1.2	2
600	400	300	1.2	1.2	2
600	500	150	1.2	1.2	2
600	500	200	1.2	1.2	2
600	500	250	1.2	1.2	2
600	500	300	1.2	1.2	2
600	600	150	1.2	1.2	2
600	600	200	1.2	1.2	2
600	600	250	1.2	1.2	2
600	600	300	1.2	1.2	2
700	400	200	1.2	1.2	2
700	400	300	1.2	1.2	2
700	500	150	1.2	1.2	2
700	500	200	1.2	1.2	2
700	500	250	1.2	1.2	2
700	500	300	1.2	1.2	2
700	600	200	1.2	1.2	2
700	600	250	1.2	1.2	2
700	600	300	1.2	1.2	2
800	600	200	1.5	1.5	2
800	600	250	1.5	1.5	2
800	600	300	1.5	1.5	2
800	600	400	1.5	1.5	2
800	800	200	1.5	1.5	2
800	800	250	1.5	1.5	2
800	800	300	1.5	1.5	2
1000	600	200	1.5	1.5	2
1000	600	250	1.5	1.5	2
1000	600	300	1.5	1.5	2
1000	700	200	1.5	1.5	2
1000	800	200	1.5	1.5	2



## **Stainless Steel Distribution Box**

### TS Metal Box Stainless Steel Distribution Box

#### **Technical parameter:**

Н	W	D		Thickness	
mm	mm	mm	Door/mm	Body/mm	M.P/mm
1000	800	250	1.5	1.5	2
1000	800	300	1.5	1.5	2
1000	800	400	1.5	1.5	2
1000	1000	250	1.5	1.5	2
1000	1000	300	1.5	1.5	2
1200	600	200	1.5	1.5	2
1200	600	250	1.5	1.5	2
1200	600	300	1.5	1.5	2
1200	800	200	1.5	1.5	2
1200	800	250	1.5	1.5	2
1200	800	300	1.5	1.5	2
1200	1000	250	1.5	1.5	2
1200	1000	300	1.5	1.5	2
1200	1000	400	1.5	1.5	2
1200	1200	250	1.5	1.5	2
1200	1200	300	1.5	1.5	2
1400	600	300	1.5	1.5	2
1400	800	300	1.5	1.5	2
1400	800	400	1.5	1.5	2
1400	1000	300	1.5	1.5	2
1400	1000	400	1.5	1.5	2
1400	1200	300	1.5	1.5	2

# **ED/EP Junction Box**



#### **ED** 85×85×50

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

#### Dimension:

L	W	Н	IP		
85	85	50	55		



#### **EP** 150×150×70

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

L	W	Н	IP	
150	150	70	55	



# ET/MB-BA··· Junction Box



#### ET 200×200×80

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

#### Dimension:

L	L W		IP
200	200	80	65



#### MB-BA 150×110×70

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

#### Dimension:

L	W	Н	HOLE NO	IP
150	110	70	10	65



#### MB-BA 200×100×70

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

#### Dimension:

L	W	Н	HOLE NO	IP
200	100	70	8	65



#### MB-BA 255×200×80

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

#### Dimension:

-	L	W	Н	HOLE NO	ΙP
	255	200	80	12	65



#### MB-BA 400×350×120

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

#### Dimension:

L	W	Н	HOLE NO	ΙP
400	350	120	16	65



#### MB-BA 100×100×70

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

#### Dimension:

L	W	Н	HOLE NO	IP
100	100	70	7	65



#### MB-BA 150×150×70

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

#### Dimension:

L	W	Н	HOLE NO	ΙP
150	150	70	8	65



#### MB-BA 200×155×80

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

#### Dimension:

L	W	Н	HOLE NO	ΙP
200	155	80	10	65



#### MB-BA 300×250×120

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

#### Dimension:

L	W	Н	HOLE NO	ΙP
300	250	120	12	65



#### MB-BA 50×50

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

	L	Н	HOLE NO	IP
	50	50	4	55

# MEBA ELECTRIC ENTERPRISES.

# MB-BA / MB-BT··· Junction Box



#### MB-BA 80×50

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

#### Dimension:

L	Н	HOLE NO	IP
80	50	4	55



#### MB-BT 100×100×70

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

#### Dimension:

L	W	Н	HOLE NO	ΙP
100	100	70	7	65



#### MB-BT 150×150×70

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

#### Dimension:

L	W	Н	HOLE NO	IP
150	150	70	8	65



#### MB-BT 255×200×80

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

#### Dimension:

L	W	Н	HOLE NO	IP
255	200	80	12	65



#### **MB-BT 80×50**

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

#### Dimension:

L	Н	HOLE NO	IP
80	50	4	55



#### MB-BA 85×85×50

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

#### Dimension:

L	W	Н	HOLE NO	ΙP
85	85	50	7	55



#### MB-BT 150×110×70

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

#### Dimension:

L	W	Н	HOLE NO	ΙP
150	110	70	10	65



#### MB-BT 200×155×80

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

#### Dimension:

L	W	Н	HOLE NO	ΙP
200	155	80	10	65



#### MB-BT 50×50

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

#### Dimension:

L	Н	HOLE NO	IP	
50	50	4	55	



#### MB-BT 85×85×50

#### Specification:

- Easy and safe to use
- The branch line runs parallel to the main cable
- High moisture resistance and excellent mechanical protection
- Full range of sizes availble

L	W	Н	HOLE NO	ΙP	
85	85	50	7	55	